

N6082 Extra Mini Bullet Network Camera



2 Megapixel / H.264 / 720P Real-Time / IR LED

- 2 Megapixel 1/4" CMOS Sensor in High Resolution
- H.264/MJPEG Dual Codec & Streaming simultaneously
- Fixed Lens 2.8mm F2.0
- UXGA (1600x1200@15fps) / WXGA (1280x720@30fps)
- 3D Noise Reduction
- Digital WDR
- 20 meters IR LED
- Intelligent Video Analytics
- IP 66 Water Proof
- DC12V&PoE Power Over Ethernet IEEE802.3af




Specifications

Camera		Processors and Memory	
Sensor	2 Mega Pixel 1/4" CMOS sensor	CPU	ARM9 SoC
Scan Method	Progressive	Flash and Memory	16MB NOR flash, 128MB DDRII
Lens	Fixed Lens 2.8mm F2.0	I/O and Connectors	
Number of Effective Pixel (H*V)	1600 x 1200	LAN	1x RJ45 Ethernet connector
Minimum Illumination	0.1Lux (F1.6, AGC max.) 0Lux (IR On)	Software Compatibility	
Horizontal Resolution	950TVL	Browser	Internet Explorer 6.0 or above
Dynamic Range	71db	Application Software	VMS Application Software
SNR(max)	42db	OS supported	Microsoft Windows 2000, XP, Vista, Windows 7
DNR	High/Middle/Low, 3 steps selection	Open API	
White Balance	Auto	CGI commands to control camera Media SDK to handle streaming	
Gain Control	High/Middle/Low, 3 steps selection	Factory Default	
Flicker Control	Off/50Hz/60Hz, 3 steps selection	Button	
Electronic Shutter	Auto/Slow shutter	Power	
IR Illuminators		Power	DC12V+PoE (DC Jack)
Wavelength Range	850nm	Power Consumption	6.2W
Distance	20M	Demension	
Day and Night	IR-Cut Filter Removable (ICR)	63mm(Φ) x 166mm(L)	
Beam Angle	30° / 50° mixed	Weight	
Video		450g	
Video Compression	H.264 (MPEG-4Part 10/AVC)/MJPEG, Dual codec	Operating Environment	
Video framerate	1600x1200@15fps/1280x720@30fps	Operating temperature	-20°C~ +50°C
Resolution	H.264 : 2MP(1600x1200@15fps) 720P(1280x720@30fps) MJPEG : 2MP(1600x1200@5fps) 720P(1280x720@30fps)	Storage temperature	-30°C~ +60°C
Bitrate control	CBR and VBR, 128kbps~4Mbps	Humidity	0% ~ 95% non-condensing
Multi-streams	Dual streaming, Multiple profiles 1280x720 H.264@30fps/640x352 H.264(Sub) @30fps/1280x720 MJPEG@15fps 1600x1200 H.264@15fps/640x480 H.264(Sub) @15fps/1600x1200 MJPEG@5fps	Certification	
Digital Zoom (PC side)	1/4X, 1/3X, 1/2X, 1X, 2X, 4X	CE, FCC Class A, RoHS, IP 66	
Image Rotation	Mirror, Flip, Rotate 180°	Warranty	
Intelligent Video		24 months	
De-noise	Yes		
Motion detection	Yes		
Blind detection	Yes		
Privacy Mask	Yes		
Panning/Tilting			
Number of the Preset Positions	16		
Network			
Streaming Protocols	RTSP/RTP/UDP, RTSP/RTP/TCP, RTSP/RTP/HTTP tunneling, LAN Multicast, Multipart-JPEG		
Supported Protocols	IPv4, IPv6, HTTP, UDP, TCP, ICMP, IGMP, ARP, DHCP, NTP, SMTP, FTP, SAMBA, UPnP, PPPoE, DNS, DDNS, RTSP, RTP, RTCP, ONVIF		
Mobile Surveillance	iPhone, iPad, Android, BlackBerry		

Member of **ONVIF** **CE** **FC** **RoHS** Compliant

Dimension Diagram

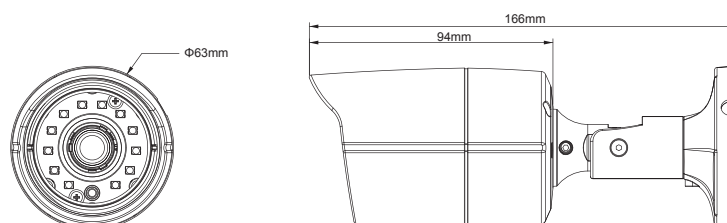

Distributed by:

3S PocketNet Technology Inc.

7F., No.5, Lane 16, Sec. 2, Sichuan Rd. Banqiao Dist.,
New Taipei City 22061, Taiwan (R.O.C.)
Tel: +886.2.8967.2909
Fax: +886.2.8967.2779

Any detail of Spec. will be fine-tune

Actual data throughput may vary. Network conditions and environmental factors, including volume of network traffic, building materials and construction, and network overhead, lower actual data throughput rate. Actual performance may vary due to operation conditions. Reserved the right to modify without notice. Copyright © 2013 3S POCKETNET Tech. Inc. All Rights Reserved.

3Svision.com.tw